


Construction:

The unit consists of a lamp body (1) with an in-built tray (2) holding an igniter module (3) and a lampholder (4). The tray is covered by a housing (5), to which a reflector (6) can additionally be fixed. The tightness of the connection between the housing and the lamp base is provided by a gasket (8). A lamp (7) is put in the lampholder. A shade (9) is fitted to the lamp body (1).


Mounting instructions:

- *)-Mount the igniter module (3) and the lampholder (4) on the tray (2).
- *)-Connect the electrical system of the pole to the igniter module(3).
- *)-Fix the tray (4) to the lamp body (1)
- *)-Fix the housing (5) complete with the gasket (8) to the lamp body (1).
-Put the bulb (7) in position.
-Attach the RASTER reflector (6) to the housing (5) with the bolts.
-Screw the shade (9) all the way into the female threaded lamp body.

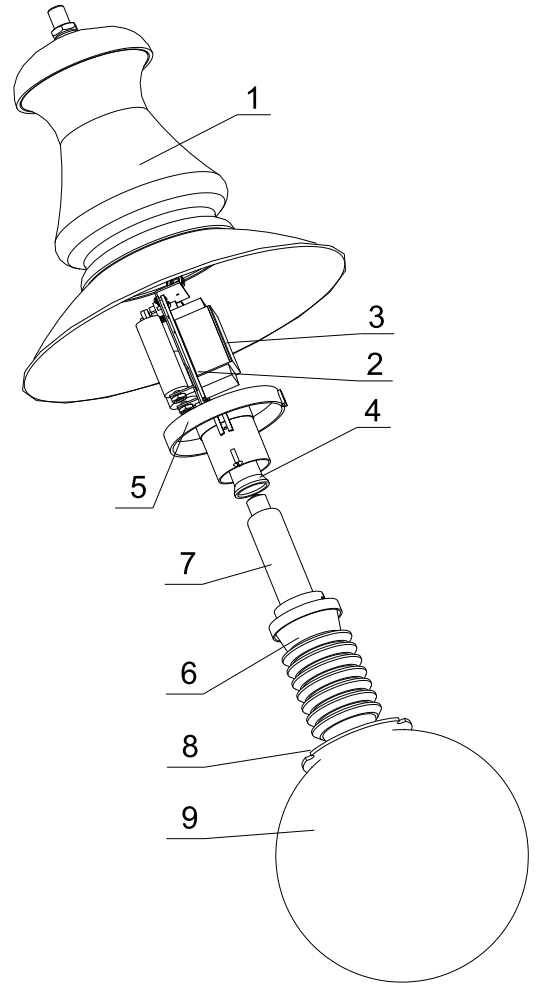


If any lantern elements are supplied factory-mounted, the mounting stages marked with *) should be omitted (as this has already been done by the manufacturer)

TECHNICAL DATA:

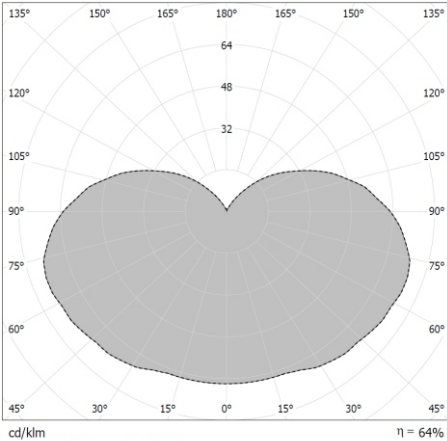

Photometry (polar plot)

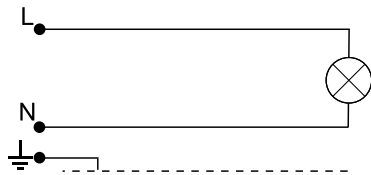




1. Incandescent bulb

Power: ~230/50Hz


Protective class: I 

IP66 -electrical part


IP66 -optical part




ELECTRICAL DIAGRAM:

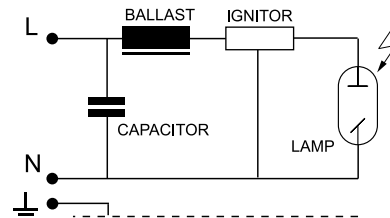

2. Sodium / metal halide lamps

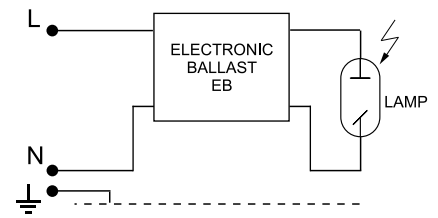

3. Sodium / metal halide lamps

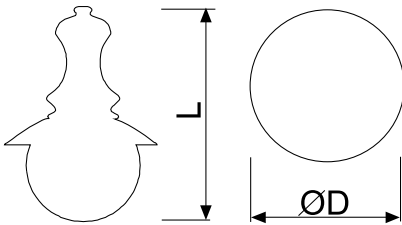Type	Light-producing element	Lamp holder	Weight [kg]	Pn [W]		Luminary dimensions
				IC	EB	
09MH-70W	MH/HSI/HPI	E27	7,8	81	78	 <p>Wind area A = 0,12m²</p> <p>L/D 600/420</p>
09S-70W	WLS/SHP/SON	E27	7,8	81	78	
09Z-E/Z	Bulb / MINI-LINX	E27	6,4	Max. 60		

WARNING !! The weight of the unit may slightly differ for individual production batches.